

Assembly Instructions for cable gland: **121 Industrial General Purpose**





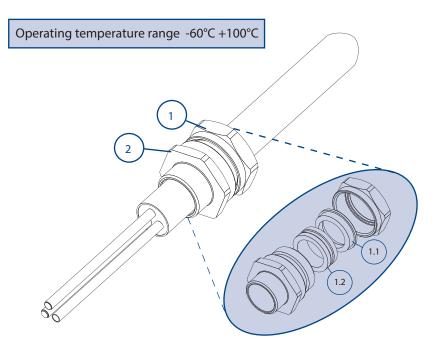

Cable Preparation

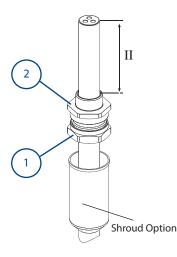


A

Allow sufficient length of cable, II, to suit equipment. If required, fit shroud.

Pass cable through the cable gland as shown above.

Note: If the equipment has a threaded entry, it may be advisable to screw the cable gland into the equipment to prevent twisting of the cable after Step B

Gland Preparation

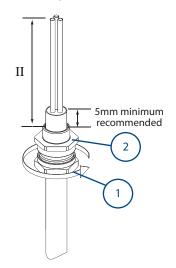

В

Unless already screwed into the equipment, hold the entry $\ensuremath{\mathbb{Q}}$ in position with a spanner/wrench to prevent rotation and tighten the backnut ① using a wrench/spanner until resistance is felt between the seal and cable. Then turn the back nut through a further half to one full turn to complete the inner seal. Locate the shroud over the cable gland, if applicable.

To ease wiring inside the equipment it may be beneficial to strip the outer sheath of the cable as shown above.

IMPORTANT: Support the cable to prevent it from twisting

Connection Solutions

Hawke International is a division of Hubbell Ltd. Registered No. 669157 in England. Registered Office: nnon Place, 78 Cannon Street, London EC4N 6AF A member of the Hubbell Group of Companies

www.ehawke.com

UK Office Oxford Street West, Ashton-Under-Lyne, Lancashire. OL7 0NA. UK

Sales: +44 (0) 161 830 6698 Technical: +44 (0) 161 830 6697

Fax: +44 (0) 161 830 6648 E-mail: sales@ehawke.com

CABLE GLAND SELECTION TABLE												
			(Cable Accept	ance De		Hexagon Dimensions					
Size Ref.	Entry	Thread Size		Outer S	heath	Max						
		NICT		andard Seal		native I (S)	Length	Across	Across			
	Metric	NPT	Min.	Max.	Min.	Max.		Flats	Corners			
2K	M16		3.0	8.0			39	19.0	21.2			
Os	M20 [•]	1⁄2"	3.0	8.0			38	24.0	27.7			
0	M20 [•]	1⁄2"	7.5	11.9			39	24.0	27.7			
А	M20	1/2" - 3/4"	11.0	14.3	8.5	13.4	38	30.0	34.6			
В	M25	3⁄4" - 1"	13.0	20.2	9.5	15.4	41	36.0	41.6			
С	M32	1" - 1¼"	19.0	26.5	15.5	21.2	43	46.0	53.1			
C2	M40	11⁄4" - 11⁄2"	25.0	32.5	22.0	28.0	44	55.0	63.5			
D	M50	1½" - 2"	31.5	42.3/44.4	27.5	34.8	61	65.0	75.1			
Е	M63	2" - 2½"	42.5	54.3/56.3	39.0	46.5	59	80.0	92.4			
F	M75	21⁄2" - 3"	54.5	65.3/68.2	48.5	58.3	60	95.0	109.6			
G	M80	31⁄2"	67.0	73.0			54	106.4	123.0			
Н	M90	31⁄2"	67.0	77.6			54	115.0	132.8			
J	M100	4"	75.0	91.6			54	127.0	146.7			

• Sizes Os and O are available with an M16 thread size. If M16 entry is used on O size Cable Glands the maximum cable inner sheath diameter is limited to 10.9mm.

	CABLE GLAND CLASSIFICATION															
	Material			Mechanical Properties			Electrical Properties				External Influences			Sealing System		
	Metal	Non-Metallic	Composite	Without Cable Anchorage	With Cable Anchorage	Impact Category	Cable Retention (Armoured Cable)	Equipotential Bonding	Connection to Metallic Layers	Protective Connection to Earth	Insulation Characteristics	Ingress Protection	Temperatire Range	Resistance to Salt and Sulpher Dioxide Laden Atmospheres	Single Orifice Seal	Multi-Orifice Seal
Cable Gland Type					Туре	Category	Class			Category		IP66	-60° to 100°			
121	Y			х	A	8	Х	Y	х	х	х	Y	Y	Y	Y	х

INSTALLATION GUIDELINES:

- 1. The cable glands are only suitable for use with fixed apparatus, the cable for which must be effectively clamped and cleated elsewhere.
- 2. This cable gland has an operating temperature range of -60° C to $+100^{\circ}$ C.
- A seal must be formed between the equipment and the cable gland to maintain the appropriate degree of protection against ingress of dust, solid objects and water.

Declaration of Conformity in accordance with European Directive 2006/95/EC (until 19th April 2016) and EU Declaration of Conformity in accordance with European Directive 2014/35/EU (from 20th April 2016) Manufacturer: Hawke International Address: Oxford Street West, Ashton-under-Lyne, OL7 0NA, United Kingdom. Equipment Type: 121 Industrial Gland

On behalf of the above named company, I declare that, on the date the equipment accompanied by this declaration is placed on the market, the equipment conforms with all technical and regulatory requirements of the above listed directives.

Standards used: EN 62444 : 2013

Attendant

A. Tindall Technical Manager

ACCESSORIES:

Before cable gland assembly or stripping of the cable gland assembly, consideration should be given to any cable gland accessories that may be required, such as: -

- Shroud, to offer additional corrosion protection.
- Locknut, to secure cable glands into position.
- Sealing washer, to offer additional ingress protection of the enclosure at the cable gland entry.
- Earthtag, to provide an external armour/braid bonding point.
- Serrated washer, to dampen any vibrations that may loosen the locknut or cable gland assembly.